


SPECIFICATIONS

	390 SS (WITH MIX)	340 SS (WITHOUT MIX)	270 SS	270 VE
Cat. No.	G390SS	G340SS	G270SS	G270VE
Gas type	Natural	Natural	Natural	Natural/LPG
Tank Capacity	155 Litres	155 Litres	130 Litres	135 Litres
Nominal gas consumption	40 MJ/Hr	40 MJ/Hr	33 MJ/Hr	30 MJ/Hr
AGA Star Rating Index	5 Stars	5 Stars	5 Stars	5 Stars
Recovery rate at 45°C rise	185 Litres/Hr ²	185 Litres/Hr ²	145 Litres/Hr ²	135 Litres/Hr ²
Installation type	External only	External only	External only	External only
Pressure & Temperature Relief Valve setting	1400 kPa/99°C	1400 kPa/99°C	1400 kPa/99°C	1400 kPa/99°C
Max. water supply pressure	1100 kPa	1100 kPa	1100 kPa	1100 kPa
Tank material	stainless steel	stainless steel	stainless steel	vitreous enamel lined
Water inlet connection	Rp 3/4" (20mm) Female	Rp 3/4" (20mm) Female	Rp 3/4" (20mm) Female	Rp 3/4" (20mm) Female
Water outlet connection	Rp 3/4" (20mm) Female	Rp 1/2" (15mm) Female	Rp 1/2" (15mm) Female	Rp 3/4" (20mm) Female
Gas connection	1/2" flared compression	1/2" flared compression	1/2" flared compression	1/2" flared compression
Warranty (Cylinder)	10 years	10 years	10 years	5 years
WaterMark Licence No.	WMKA00200	WMKA00200	WMKA00200	WMKA00200
Overall height	1635mm	1635mm	1410mm	1410mm
Width (approx.)	520mm	520mm	475mm	475mm
Depth (approx.)	610mm	610mm	545mm	545mm
AGA Approval No.	6114	6114	7477	6705
Weight empty (approx.)	65 kg	65 kg	46 kg	65 kg

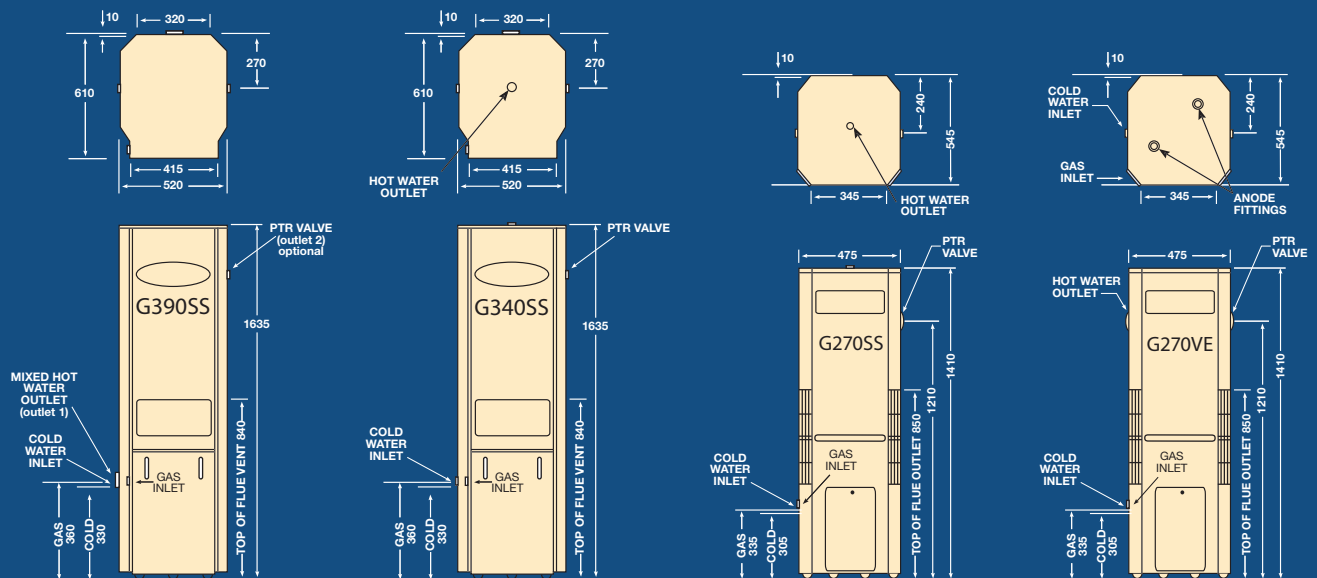

1 Full Warranty conditions available on request from AquaMAX Australia Pty Ltd. Call Toll Free 1800 676 000
 2 Based on an inlet water temperature of 15°C
 3 When compared to standard 3 Star Gas Storage Water Heaters